

MILITARY GRADE TDHV-3000 SERIES 3000-WATT SINGLE OUTPUT AC-DC CONVERTER 3-PHASE INPUT POWER FACTOR CORRECTED



TYPICAL IMAGE

APPLICATIONS

The TDRSP-3000 series of Power Factor Corrected AC-DC power supplies provides highly regulated output power to 3000-watts. Rugged construction and superior quality make this power supply ideal for harsh environment applications. Available in standard, modified, or fully custom configurations, for industrial, commercial, COTS ruggedized and Military applications.

STANDARD FEATURES

- Input and Output Good signals
- Internal EMI Filtering
- Forced air cooling, Internal fan
- Compact size
- High Power Density
- Rugged Construction
- OV, OL, OT protection
- ORing Diode for Redundant Operation
- Ruggedized for shock & vibration
- Conformal Coated all boards
- Meets the high transients of MIL-STD-704A, but will shut down when low voltage transients fall below 80V (L-N)

SAFETY AND EMISSIONS

- Designed to meet MIL-STD-461G, sections RE102 & CE102
- Designed to meet UL/cUL62368-1
- Designed to meet TUV EN62368-1
- Designed to meet EN55035

INPUT SPECIFICATIONS:

Input: 115/200, 3 Φ , 50, 60, or 400Hz
Inrush Current: 60A max
Input Current: 17A
Efficiency: 86% typical
Hold-up Time: 16ms at full load (minimum)
Leakage Current: <5.0mA maximum at 115/200VAC
Harmonics: EN 61000-3-2

OUTPUT SPECIFICATIONS:

Minimum Load: none
Regulation: Line: $\pm 1\%$, Load: $\pm 1\%$
Ripple / Noise: $\pm 1\%$
Output Voltage Adj: $\pm 5\%$
Overcurrent Protection: 105-125% automatic recovery Constant Current
Overvoltage Protection: 115-140% of V1 nominal
Overtemperature Protection: Heatsink Temp. 90°C $\pm 5^\circ$ C Auto Recovery

ENVIRONMENTAL SPECIFICATIONS:


Operating Temperature: -35°C to +70°C. Derate to 50% at +70°C
Storage Temperature: -40°C to +85°C max 95% Relative Humidity
Cooling: Internal ball bearing DC fan
Humidity: 20-90% RH non-condensing
Vibration: 10-500Hz, 2G 10min/cycle for 60 min (3 axes)
Shock: 20G Peak Acceleration
Weight: Approx. 24 lbs. / 10.9 Kg
Size: 14" x 8" x 5.25"

MODEL SELECTION

MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT
TDHV-3P-3000-270-SA-MIL	270V	11A
TDHV-3P-3000-125-SA-MIL	125V	24A

NOTE: OTHER VOLTAGES & CURRENTS AVAILABLE. CONSULT THE FACTORY.
 INPUT VOLTAGE RANGE DETERMINE OUTPUT POWER.
 CONTACT FACTORY FOR ADDITIONAL INFORMATION

MECHANICAL OUTLINE

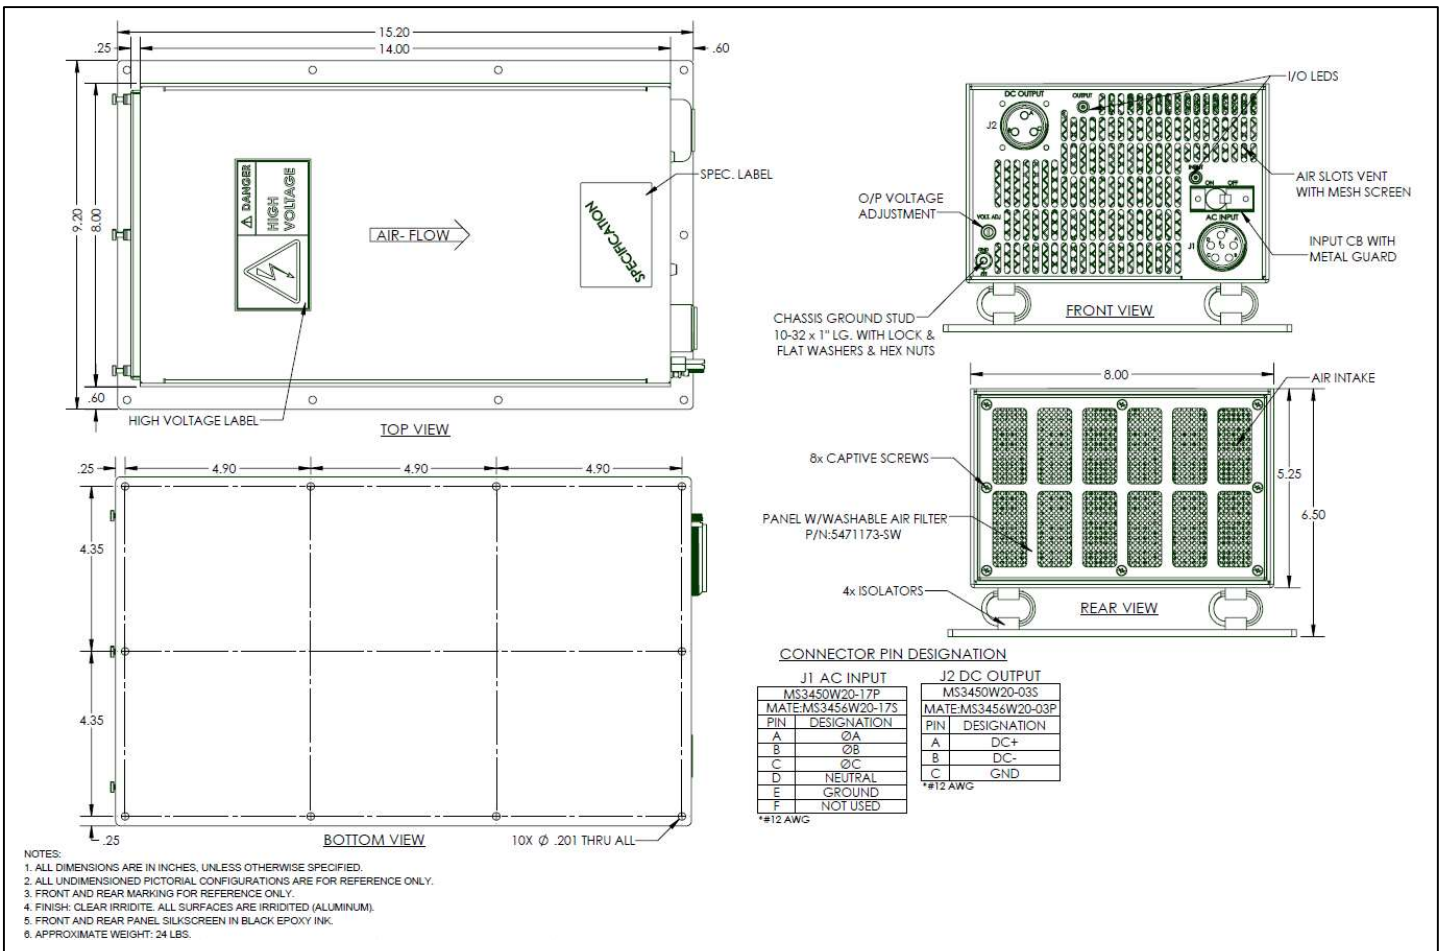

Technology Dynamics Inc. is not responsible for any errors in this data sheet nor any damages or injuries resulting from the use of this product.